


Heating and lighting contactors

6-20mm
Conduit Knockout
(7-20/25mm
Conduit Knockout)

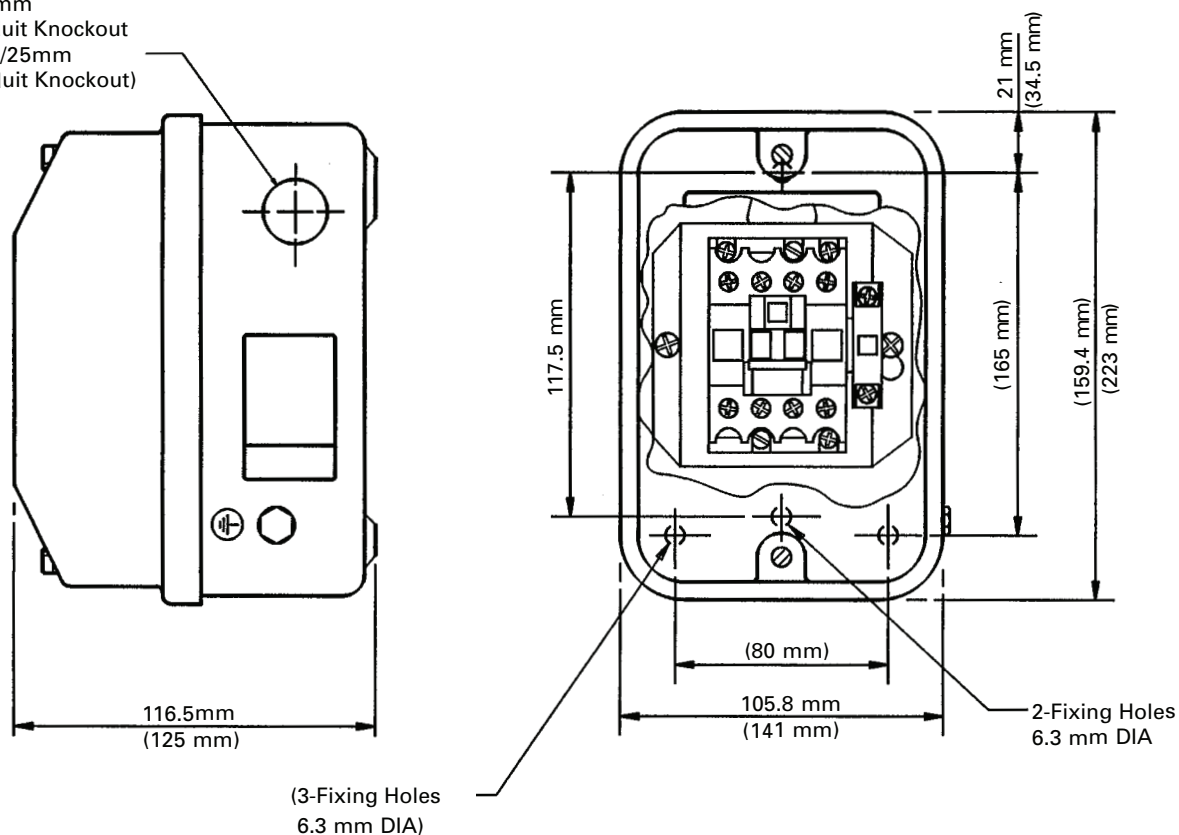

Additional side mounting auxiliary contacts for DOL, DOL reversing, Star Delta starters and Autoline

- 1 NO, 1NC lth 10A Ui 600v

Description	Current rating (A)	Coil voltage	Starter list number	Maximum side mount auxiliaries	Eaton list number
DOL Starter	25	220–240	28ADS2X	2	8TA8DN11
DOL Starter	25	380–415	48ADS2X	2	8TA8DN11
Starter with disconnect	18	220–240	28ADSA1X	2	8TA8DN11
Starter with disconnect	18	380–415	48ADSA1X	2	8TA8DN11
Starter with disconnect	25	220–240	28ADSA2X	1	8TA8DN11
Starter with disconnect	25	380–415	48ADSA2X	1	8TA8DN11