

# Technical data sheet

## Aluminium empty housing Mx16-Mx36, sandblasted

Item number: 2011360



Robust aluminium empty housing for mechanical engineering and automation technology.

The OBO Mx series' excellent features make it most suitable for extreme demands in all different areas. It is therefore also best suited for applications in industry, ports and shipbuilding, as well as in the agricultural sector.

The series' properties protect the electrical installation when under extreme strain. The products withstand both great cold and heat as well as impacts or kicks on roads, railways or in tunnels.

With a protection class of up to IP66, they are optimally protected against the intrusion of water. The aluminium is of course UV-resistant and halogen-free. The cover seal is made from polyurethane.

The aluminium housings are sandblasted and are delivered with a cover including stainless steel screws, a seal and 2 or 4 earthing screws.

The surface provides a good contact when using metal fittings.

Temperature: -40°C to +125°C



**AIG** Cast aluminium

**SGT** Sandblasted

### Master data

Item number	2011360
Description 1	Aluminium empty housing
Manufacturer	OBO
Dimension	160x160x90
Material	Cast aluminium
Surface	Sandblasted
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	146.3 kg
Weight unit	kg/100 pc.


# Technical data sheet

## Aluminium empty housing Mx16-Mx36, sandblasted




Item number: 2011360

### Dimensions

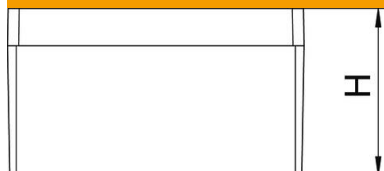

Length	160 mm
Width	160 mm
Height	91 mm

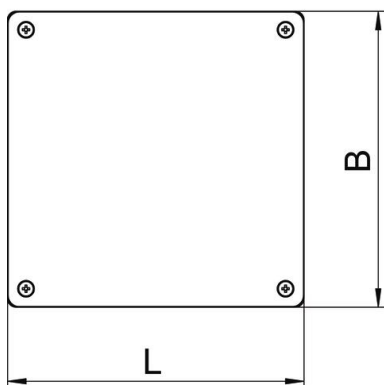

### Technical data

Extension option	yes
Version, small distributor cover	Closed
Cover fastening	Screwed
Shape	Square
Suitable for outdoor use	yes
Suitable for lightning protection	no
Clear internal dimensions	149x149x74,2 mm
with lid	yes
With mounting plate	no
Protection rating	IP66
Permitted temperature range, max.	125 °C
Permitted temperature range, min.	-40 °C
Weatherproof	yes